


KERB & CHANNEL
OR PARKING BAY

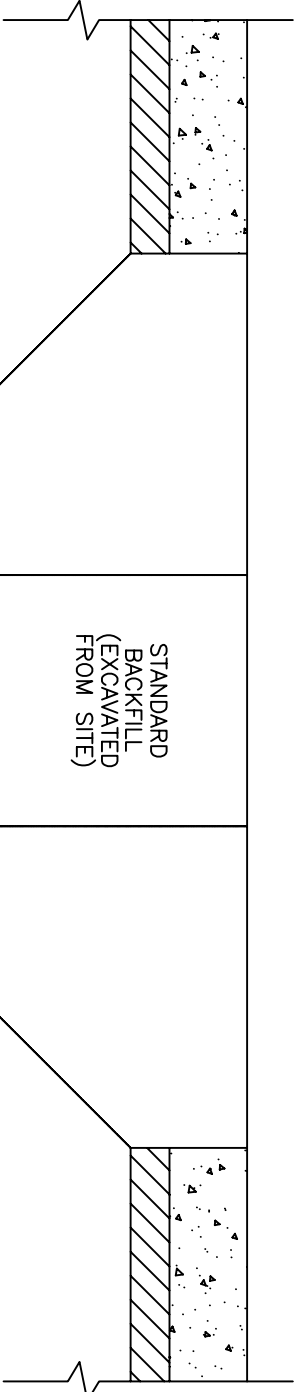

NOTE:
THIS DETAIL FOR SERVICE TRENCHES ONLY.
FCR BACKFILL TO EXTEND FULL TRENCH
DEPTH UNDER VEHICLE CROSSINGS AND
FOOTPATHS.

DRAINAGE TRENCHES BEHIND KERB &
CHANNEL ARE TO BE BACKFILLED WITH
20mm CLASS 3 FCR TO BOTTOM OF KERB.

DRAINAGE UNDER ROAD PAVEMENTS IS TO
BE BACKFILLED WITH 20mm CLASS 2 FCR
FOR THE FULL EXTENT OF THE TRENCH.

TYPICAL SECTION

20mm CLASS 3 FCR
BACKFILL COMPACTED TO
95% MOD. MAX DRY DENSITY

INFLUENCE
LINES

45°

Amendments			
No.	Zone	Detail	Date

DRAWN :	D. SALAZAR
CHECKED :	R. CHARTERS
APPROVED :	S. PLATER
SCALE :	N.T.S.
ISSUE DATE:	JUNE 2004

P.O. Box 119
1079 Pascoe Vale Road
Brooklands
Victoria 3047
Telephone
03) 9205 2200
Facsimile
03) 9309 0109

TYPE :	TYPICAL SERVICE TRENCH BACKFILL
DRAWING NO:	SD403