


PRECAST CONCRETE COVER WITH CLASS B CIRCULAR CAST IRON INSERT. PITS WITHIN 1m OF VEHICLE CROSSINGS ARE TO HAVE CLASS D COVER & SURROUND

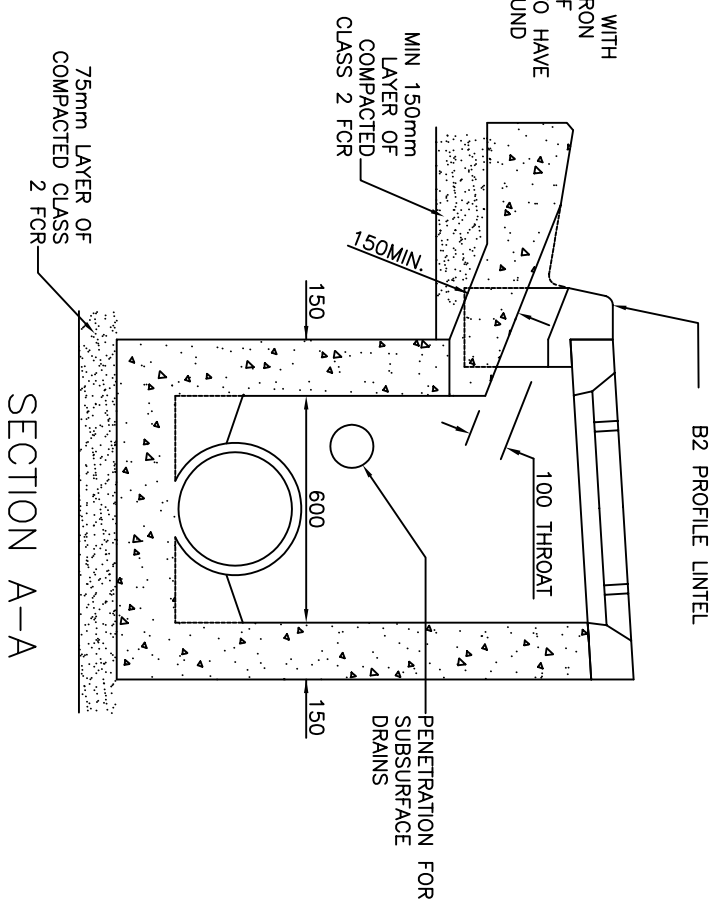

ALL DIMENSIONS IN MILLIMETRES.

RESTRICTED USE ONLY.
THIS IS ONLY TO BE USED IN SPECIAL CASES.
GENERALLY ONLY USED FOR RECONSTRUCTION WORKS

- NOTES:
1. ALL WALLS TO BE 150mm THICK.
 2. FOR PRECAST CONCRETE LINTEL DETAILS REFER TO STD. DWG. SD270
 3. FOR PRECAST CONCRETE COVER DETAILS REFER TO STD. DWG. SD275
 4. THE TOP OF THE PIT SHALL MATCH THE NATURE STRIP CROSSFALL.
 5. FLUTES TO BE PROVIDED TO PITS, WHERE KERB AND CHANNEL GRADE EXCEEDS 2%
 6. PIT TO BE HAUNCHED FOR PIPE DIAMETER GREATER THAN 450mm OR DEPTH EXCEEDING 2.0m. REFER TO STD. DWG. SD245
 7. PROVIDE STEP IRONS FOR PIT DEPTH EXCEEDING 1.0m. REFER TO STD. DWG. SD280.
 8. CONCRETE STRENGTH 25MPa AT 28 DAYS
 9. EXPANSION JOINTS TO BE INSTALLED EITHER SIDE OF PIT WITH 3 No. 450mm LONG R16 BARS GREASED OR SLEEVED ONE END.

Initials	Date	DRAWN :	S. GUCH
R.C.	JAN 05	CHECKED :	R. DEVAPURA
		APPROVED :	S. PLATER
		SCALE :	
		ISSUE DATE:	JUNE 2004

HUME
CITY COUNCIL

PO Box 119
1079 Pascoe Vale Road
Brookmeadows
Victoria 3047

Telephone (03) 9205 2200
Facsimile (03) 9309 0109

SIDE ENTRY PIT
B2 KERB & CHANNEL

DRAWING NO: SD200