


CONCRETE CONSTRUCTION

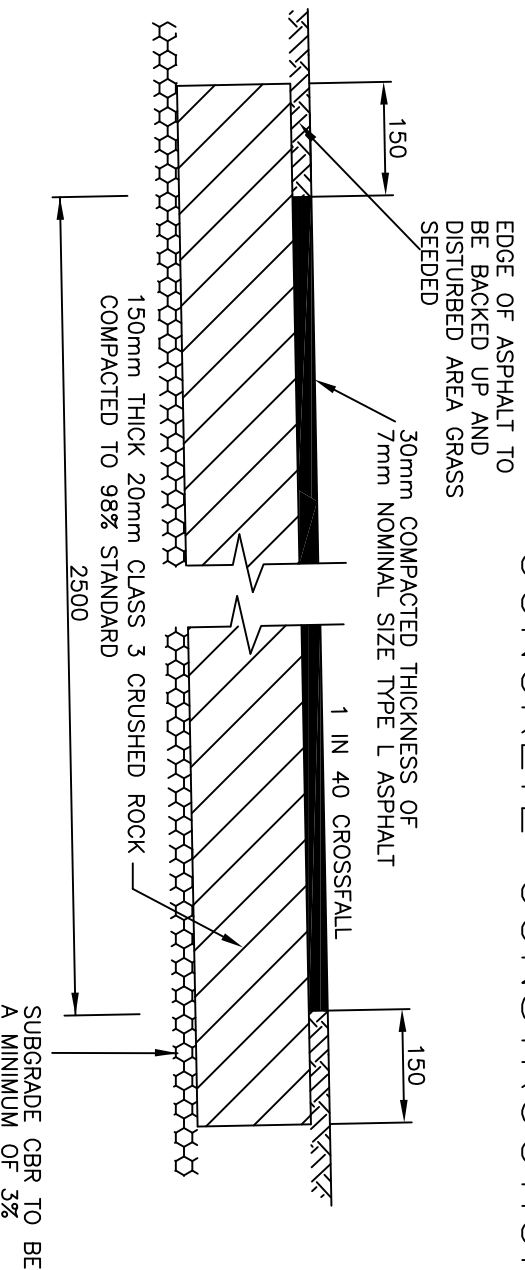

ASPHALT CONSTRUCTION

NOTES:

1. CONCRETE SHALL BE 25 MPa AT 28 DAYS. (32 MPa FOR INDUSTRIAL, COMMERCIAL, COUNCIL RESERVE & PUBLIC OPEN SPACE).
2. FORMWORK TIMBER TO BE MIN. 90MM DEEP.
3. WEAKENED PLANE JOINTS SHALL BE LOCATED AT 2.5m SPACING AND MAY BE MADE WITH A 'T' IRON (OR CONCRETE SAW WITHIN 24HRS OF POUR)
4. THE BARS TO BE INSTALLED AT 300mm MAXIMUM CENTRES COMMENCING 150mm FROM EDGE AT EACH EXPANSION OR CONSTRUCTION JOINTS.
5. EXPANSION JOINTS AT MAXIMUM 18.0m CENTRES.
6. THE FINISHED SURFACE SHALL HAVE A LIGHT BROOM FINISH.
7. FOR JOINT DETAILS REFER TO STD DWG SD306.
8. DRAINAGE TO BE PROVIDED AT LOW POINTS/FLOOD WAYS BY PROVISION OF TABLE DRAINS/CULVERTS TO THE ENGINEER'S APPROVAL.
9. ALL DIMENSIONS IN MILLIMETRES UNLESS STATED OTHERWISE.

Amendments		
No.	Detail	Date

DRAWN :	C. NGUYEN
CHECKED :	R. DEVAPURA
APPROVED :	R. DEVAPURA
SCALE :	NOT TO SCALE
ISSUE DATE:	MAY 2012



Po Box 119
1079 Pascoe Vale Road
Brookmeadows
Victoria 3047
Telephone
03) 9205 2200
Facsimile
03) 9205 2212

TYPE :

SHARED FOOT/BICYCLE PATH

DRAWING NO:

SD305